

Medium Bi-Pin Lampholders



1551 Series Turn-Type Tombstone Lampholders



Specifications

Rating: 660 Watts, 600 V

Listing: UL File No. E-13408; CSA File No. LR95423

Mounting: Bracket mounted with 6/32 x 1/2" screws.
(screws available in bulk)

Materials

Housing: White urea

Contacts: Copper alloy, surface wipe configuration


Termination: "Wire fast" terminals for

No. 18 AWG stranded (twisted, tinned and solder dipped or fused) or

No. 18 AWG solid copper wire with 3/8" strip length.

Special: Item can be factory wired per customer specifications for length, strip and wire material.

1551.P
Turn style tombstone lampholder with palnut

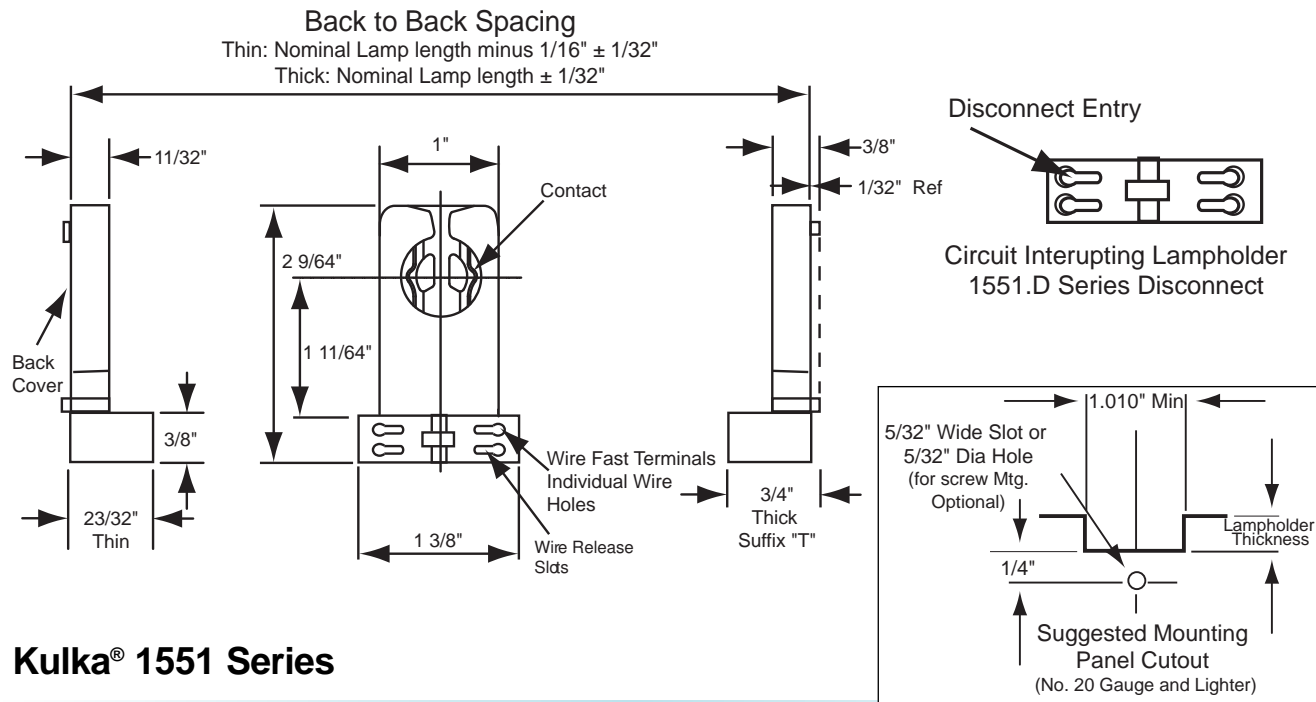

Kulka® 1551 Series

Part No.

1551.P	With pre-assembled No. 6-32 palnut and 11/32" body thickness
1551.PD	With pre-assembled No. 6-32 palnut and circuit interrupting disconnect
1551.PDT	With pre-assembled No. 6-32 palnut, circuit interrupting disconnect and 3/8" body thickness
1551.PT	With pre-assembled No. 6-32 palnut and 3/8" body thickness

1000/ box. 6/32 x 1/2" mounting screws supplied in bulk, Part No.:8063.216.001.