

# Slimline Lampholders

## For 430mA Lamps



### 532 Series Snap-In Lampholders

#### Specifications

**Rating:** 532.1, 532.3: 660 Watts, 1000 V, for non-home use.

532.2, 532.4: 660 Watts, 600 V

**Listing:** UL File No. E-13408; CSA File No. LR95423.

UL listed and CSA certified for outdoor use in enclosed signs and fixtures

**Mounting:** Snap-In

#### Materials

**Housing:** White urea

**Contacts:** Silver-plated phosphor bronze

**Gasket:** Blue silicone treated neoprene "O" ring\*

**Termination:** Lead wires 9" (228.6 mm) long, 18 AWG stranded and tinned lead wires, 1/2" stripped, standard. Wire rated: AWM 1000 V, 90°C (194°F).




**532.1**  
Spring Loaded



**532.2**  
Stationary

Blue "O" Ring is a registered trademark of Voltarc.

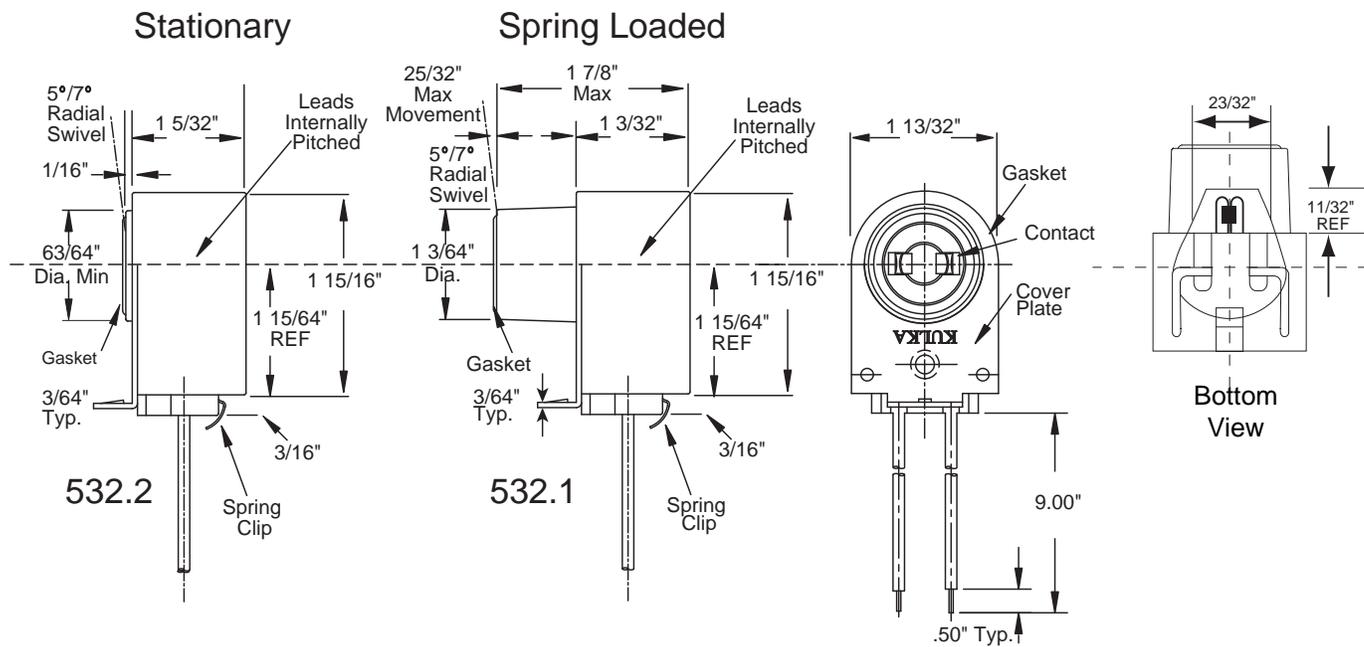

### Kulka® 532 Series

Spring Part No.	Stationary Part No.
-----------------	---------------------

532.1	532.2	Snap-in mounting, 9" long leads. Pitch and gasket standard, Mount for .036" to .048" panel thickness
532.3	532.4	Snap-in mounting, 9" long leads. Pitch and <u>no</u> gasket. Mount for .036" to .048" panel thickness.
532.18	532.28	Snap-in mounting, 9" long lead. Pitch and gasket standard. Mount for 0.125" panel thickness.

Packed 200/ box. **Special lead wire lengths available upon request, consult sales department.**  
Blue "O" Ring is a registered trademark of Voltarc.