

Medium Bi-Pin Lampholders

For 400 and 800mA **Instant Start** Lamps

Internally shunted for single wire electronic ballast applications



534K-IS™ Series Snap-In Lampholders

Specifications

Rating: 660 Watts, dual rated 600 V or 1000 V

Listing: UL File No. E-13408;

UL Listed for outdoor use in enclosed signs and fixtures

Mounting: Snap-In

Materials

Housing: White urea


Contacts: Silver-plated phosphor bronze

Gasket: Red silicone treated neoprene "O" ring.

Termination: Lead wire 9" (228.6 mm) long, 18 AWG stranded and tinned lead wires, 1/2" stripped, standard. Wire rated: AWM 1000 V, 90°C (194°F).

**534.1K-IS™
Spring Loaded**

**534.2K-IS™
Stationary**

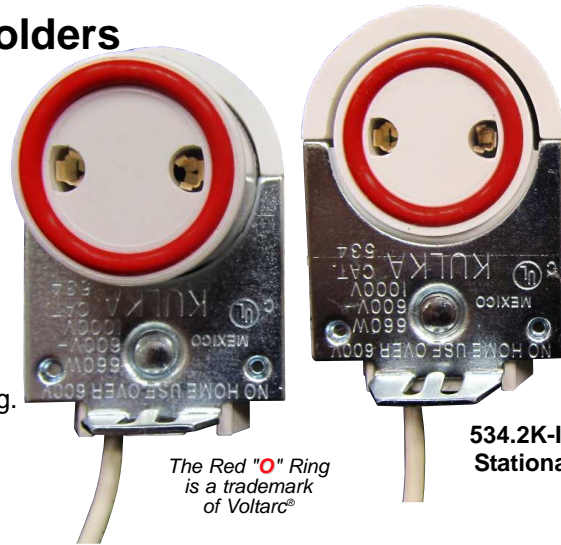


The Red "O" Ring is a trademark of Voltarc®



Stationary

Spring Loaded

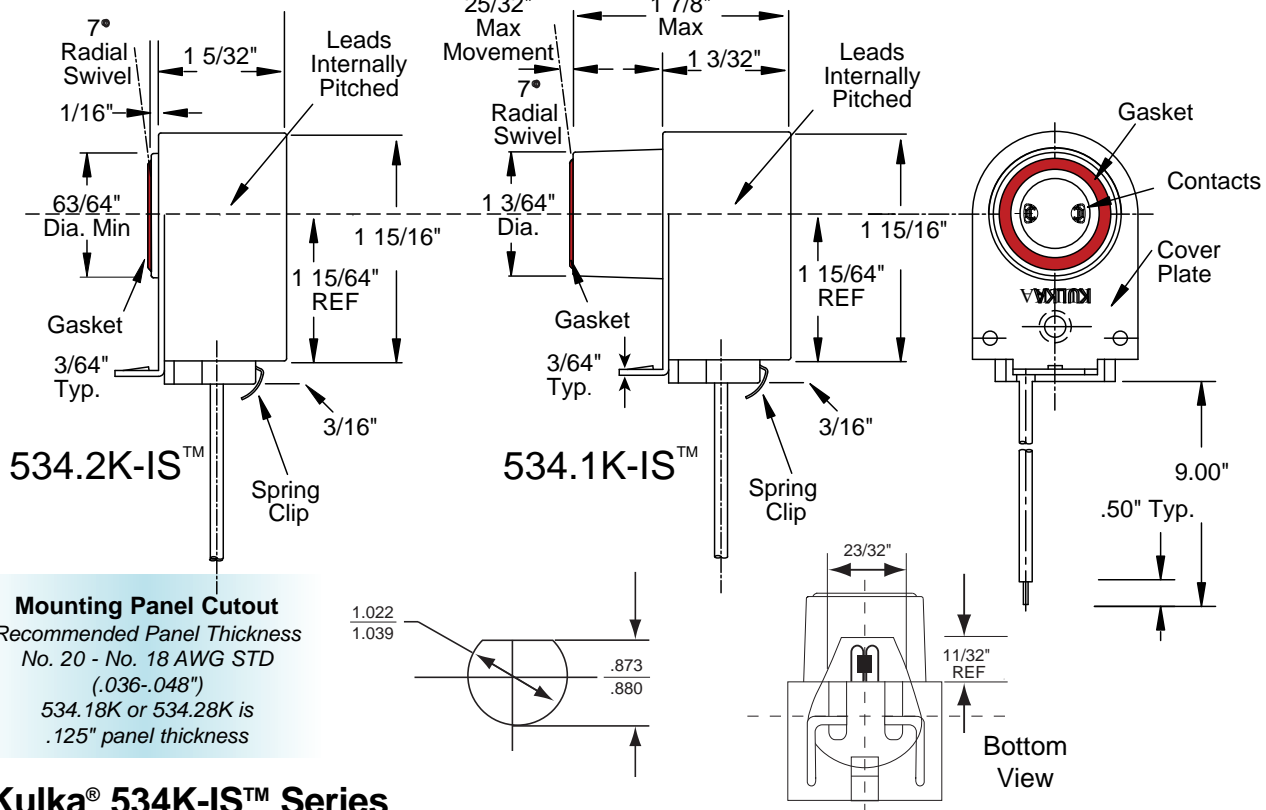

Mounting Panel Cutout
Recommended Panel Thickness
No. 20 - No. 18 AWG STD
(.036-.048")
534.18K or 534.28K is
.125" panel thickness

Kulka® 534K-IS™ Series

Spring Part No.	Stationary Part No.
-----------------	---------------------

534.1K-IS	534.2K-IS	Snap-in mounting, 9" long leadwires. Pitch and gasket are standard
534.18K-IS	534.28K-IS	Snap-in mounting, 9" long leadwires. .125" Panel thickness, pitch and gasket are standard

Packed 200/ box. **Special lead wire lengths available upon request, consult sales department.**
The Red "O" Ring is a trademark of Voltarc®