

# Recessed Double Contact Lampholders

## For 800 and 1500mA Lamps



### 1640 Series Slide-On Lampholders

Suitable for outdoor applications when properly enclosed. Slide wire horizontal contacts on both ends.



#### Specifications

**Rating:** 660 Watts, 600 V.

**Listing:** UL File No. E-13408; CSA File No. LR95423.

UL listed and CSA certified for outdoor use in enclosed signs and fixtures

**Mounting:** Slide-On

#### Materials

**Housing:** White urea

**Contacts:** Horizontal silver plated phosphor bronze



**Termination:** "Wire fast" terminals for No. 18 AWG stranded (twisted, tinned and solder dipped or fused) or No. 18 AWG solid copper wire with 3/8" strip length.

**1640.1**  
Spring Loaded

**1640.2**  
Stationary

#### Panel to Panel Spacing

Nominal lamp length minus 1/8 plus 0

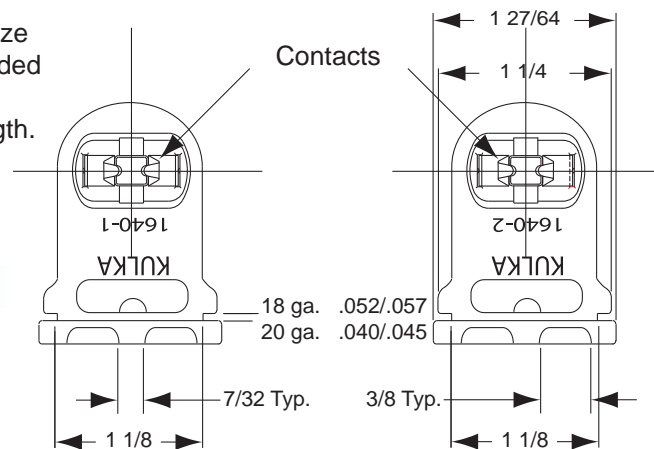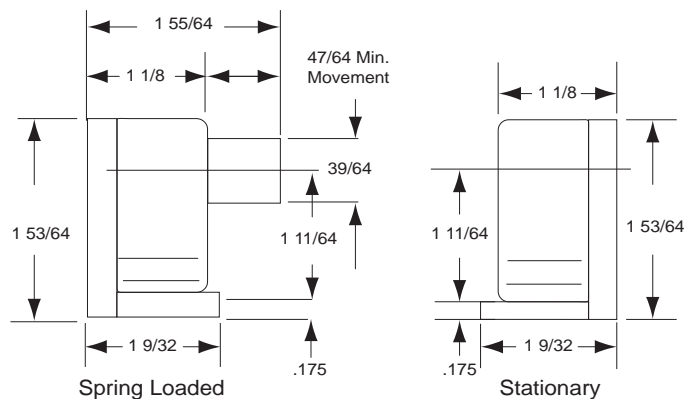

### Kulka® 1640 Series

Spring Part No.	Stationary Part No.
-----------------	---------------------

1640.1                      1640.2                      Slide-On for 20 gauge panels.

Packed 400/ box.