

# Medium Bi-Pin Lampholders



## 1710 Series Low Profile, Turn-Type

### Specifications

**Rating:** 660 Watts, 600 V

**Listing:** UL File No. E-13408; CSA File No. LR95423

**Mounting:** Slide-on slots for either 18 or 20 gauge panels with or without 6/32 palnut

### Materials:

**Housing:** White urea

**Contacts:** Copper alloy, surface wipe configuration


**Termination:** "Wire fast" terminals for No. 18 AWG stranded (twisted, tinned and solder dipped or fused) or No. 18 AWG solid copper wire with 3/8" strip length.

1710.20SC



1710.20J

**Special:** Item can be factory wired per customer specifications for length, strip and wire material.

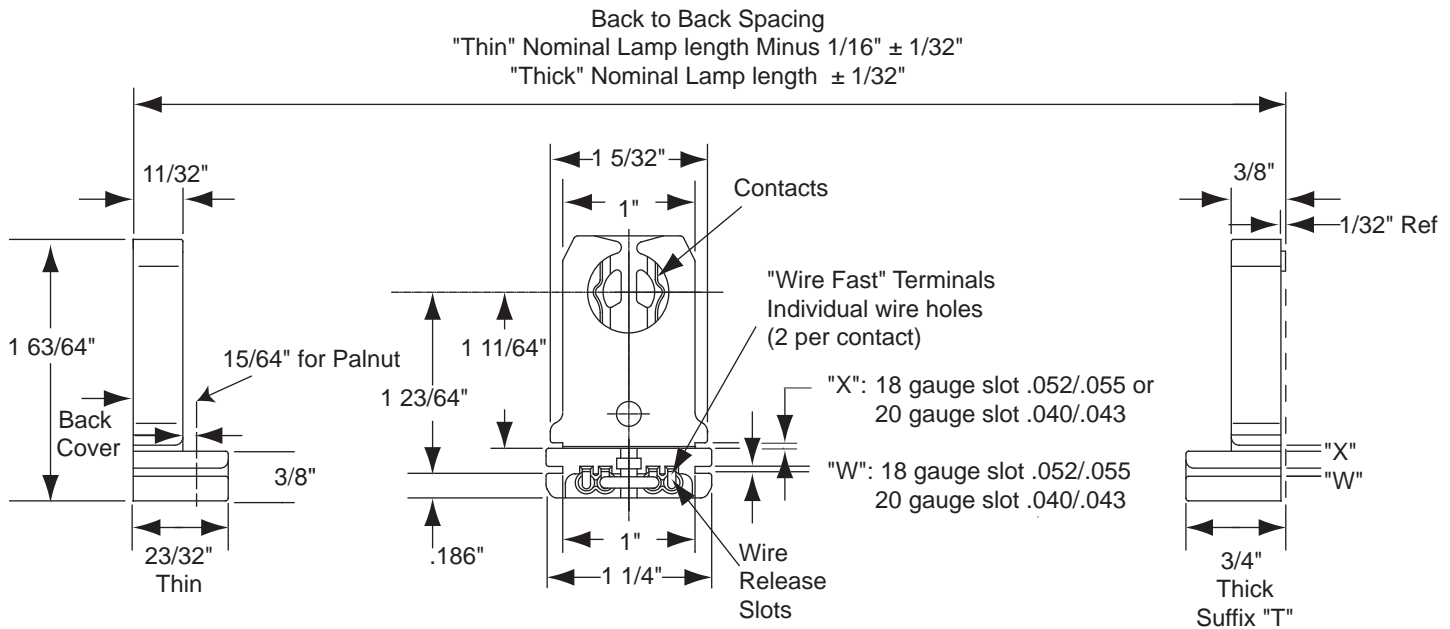


## Kulka® 1710 Series

Part No.

18 Gauge      20 Gauge

1710.18	1710.20	11/32" Body thickness
1710.18P	1710.20P	11/32" Body thickness with No. 6-32 palnut
1710.18J	1710.18J	11/32" Body thickness externally jumpered
1710.18SC	1710.18SC	11/32" Body thickness with spring clip
1710.18T	1710.20T	3/8" Body thickness
1710.18PT	1710.20PT	3/8" Body thickness with No. 6-32 palnut

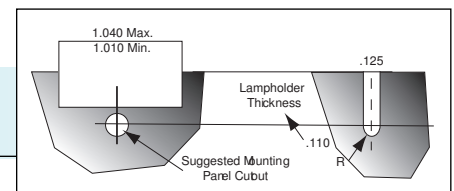

Packed 1250/ box. #6-32 x 1/2" screws sold separately p/n: **8063.216.001**.