

Convenience Outlets



227 Series Snap-In, 2 Pole - 3 wire grounding

Specifications

Rating: 15 Amps, 125 V

Listing: UL File No. E-18487;
CSA File No. LR95423.

Materials


Housing: Molded black phenolic or white urea

Contacts: Silver-plated copper alloy

Spring Clip: Spring Steel, blue tempered

Mounting: Snap-In

Terminations: Lead wires 6" (152.4 mm) long,
14 AWG standard or 16 AWG black and white,
and 16 AWG green ground lead with 1/2" strip length.
Wire rated: AWM 600 V, 105°C (221°F).

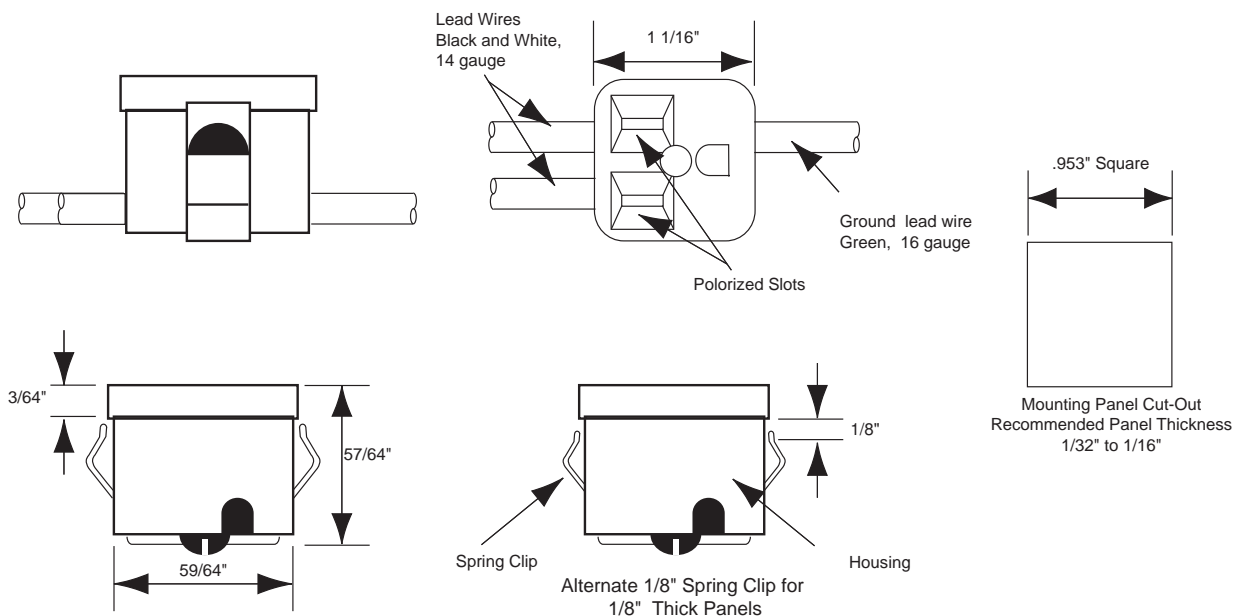

Kulka® 227 Series

Part No.	Description
227.B	6" leads standard, black
227.B8	6" leads standard, black, .125" thick panel
227.W	6" leads standard, white
227.W8	6" leads standard, white, .125" thick panel

Packed 500/ box. "O" ring lug for No. 8 screw available on ground wire.
Special lead wire lengths available upon request, consult sales department.