

# Recessed Double Contact Lampholders

For 800 and 1500mA Lamps

## 530.1K™ & 530.2K™ Series Snap-In Lampholders



### Specifications

**Rating:** 660 Watts, dual rated 600V or 1000V.

**Listing:** UL File No. E-13408; CSA File No. LR95423.

UL listed and CSA certified for outdoor use in enclosed signs and fixtures.

**Mounting:** Snap-In

### Materials

**Housing:** White urea, (Black urea for horizontal plunger contacts)

**Contacts:** Horizontal or Vertical silver plated phosphor bronze.

**Gasket:** Blue silicone treated neoprene "O" ring


**Termination:** Lead wires 9" (228.6 mm) long, 18 AWG stranded and tinned lead wires, 1/2" stripped, standard. Wire rated: AWM 1000V, 90°C (194°F).



530.2K™  
Stationary



530.1K™  
Spring Loaded

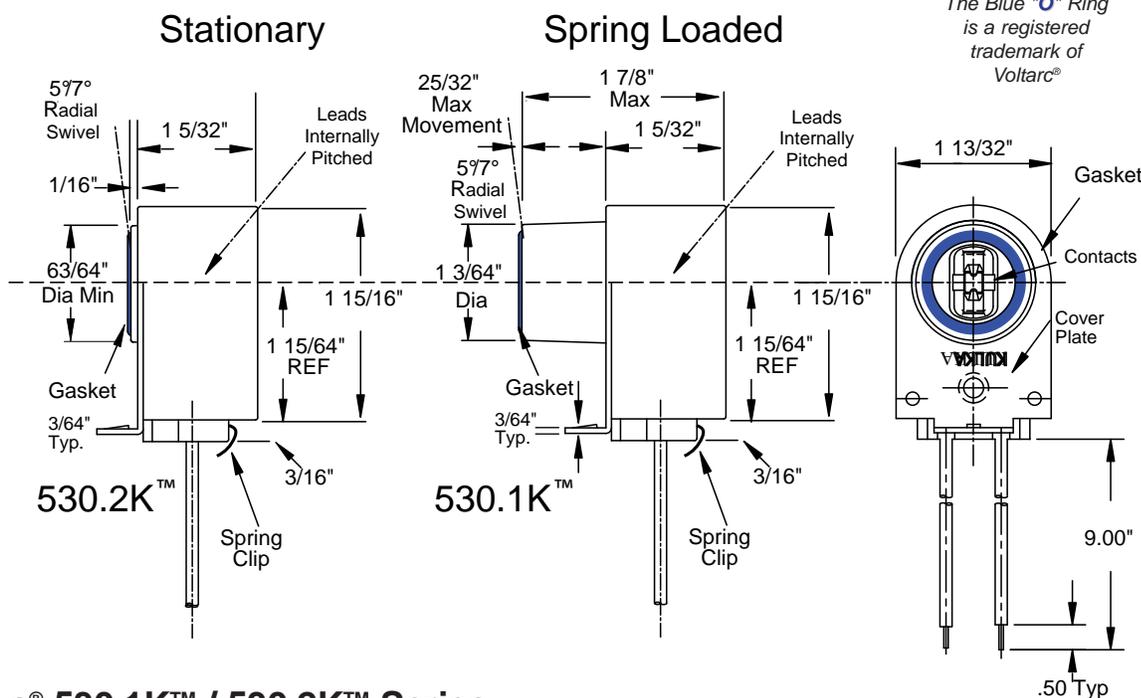

The Blue "O" Ring is a registered trademark of Voltarc®

### Kulka® 530.1K™ / 530.2K™ Series

Spring Part No.	Stationary Part No.
-----------------	---------------------

530.1K	530.2K	Vertical contacts, leads, pitch and gasket, for mounting on 0.36" to 0.48" panel.
530.5K	530.6K	Horizontal contacts, leads, pitch and gasket, for mounting on 0.36" to 0.48" panel.


### Special Configurations

530.18K	530.28K	Vertical contacts, leads, pitch and gasket, for mounting on 0.125" panel.
530.58K	530.68K	Horizontal contacts, leads, pitch and gasket, for mounting on 0.125" panel.




Packed 200/ box. **Special lead wire lengths available upon request, consult sales department.**

The Blue "O" Ring is a registered trademark of Voltarc®

**Panel to Panel Spacing**

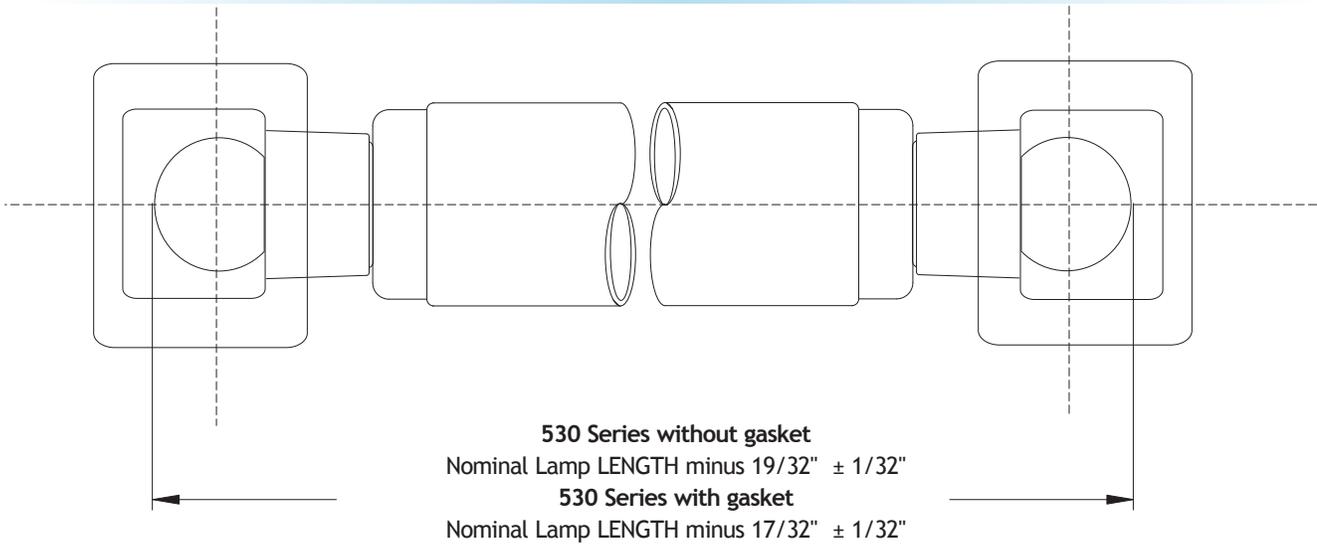

**Mounting Panel Cutout**  
Recommended Panel Thickness  
No. 20 - No. 18 gauge STD  
(.036-.048")  
530.18K or 530.28K is .125" panel thickness

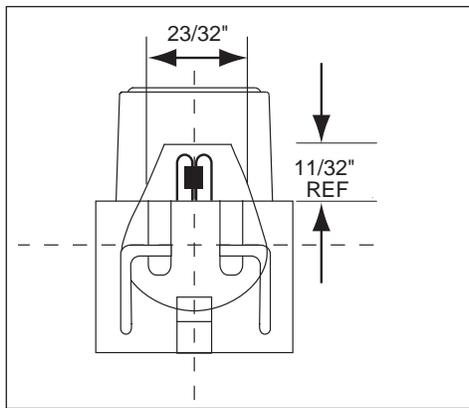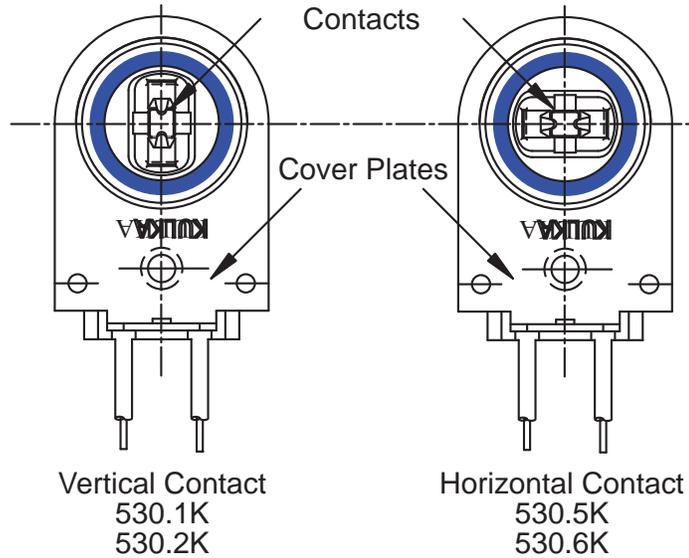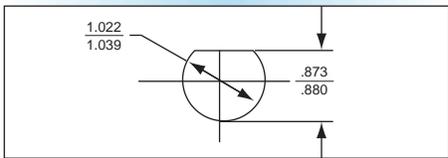

Bottom View



**530.6K**  
Horizontal Contacts  
Stationary